


DATA SHEET

Frequency converter FU IP 66 230V

ruck.eu
VENTILATOREN

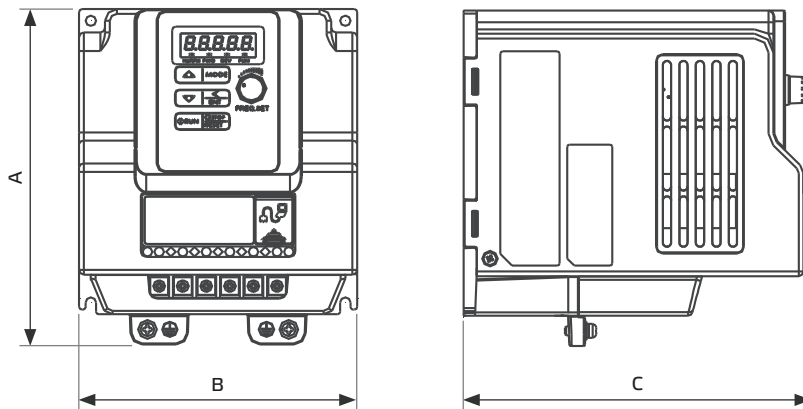

Type	ID	A mm	B mm	C mm	D mm	E mm	Gewicht kg
FU 075 14	141847	248,7	150,8	200	214,2	133,3	3,0
FU 075 15	141848	248,7	150,8	200	214,2	133,3	3,0
FU 075 16	141849	248,7	150,8	200	214,2	133,3	3,0
FU 075 17	141851	248,7	150,8	200	214,2	133,3	3,0
FU 075 18	141852	248,7	150,8	200	214,2	133,3	3,0
FU 075 19	141853	248,7	150,8	200	214,2	133,3	3,0
FU 15 11	141850	335	198	235,2	337,9	115	6,0
FU 15 12	141854	335	198	235,2	337,9	115	6,0
FU 15 13	141855	335	198	235,2	337,9	115	6,0
FU 22 12	141856	335	198	235,2	337,9	115	6,0

- Frequency converter
- Supply voltage 230 V 1~ 50/60 Hz
- Output voltage 0 - 230 V 3~
- Variable speed control
- Motor-/converter protection
- Integrated interference filter/class A
- Integrated Modbus or BacNet interface
- Configurable status/fault relay
- Easy start-up
- Temperature range -10 °C ... +40 °C
- Protection Class IP 66

Type	ID	P ₂ kW	I _A A	For models:
FU 075 14	141847	0,75	4,5	MPS 225 D2 30, MPC 225 D2 30/T30
FU 075 15	141848	0,75	4,5	MPS 250 D2 30, MPC 250 D2 30/T30
FU 075 16	141849	0,75	4,5	MPS 280 D2 30, MPC 280 D2 30/T30
FU 075 17	141851	0,75	4,5	MPS 315 D4 30, MPC 315 D4 30/T30
FU 075 18	141852	0,75	4,5	MPS 355 D4 30, MPC 355 D4 30/T30
FU 075 19	141853	0,75	4,5	MPS 400 D4 30, MPC 400 D4 30/T30
FU 15 11	141850	1,5	7,5	MPS 315 D2 30, MPC 315 D2 30/T30
FU 15 12	141854	1,5	7,5	MPS 450 D4 30, MPC 450 D4 30/T30
FU 15 13	141855	1,5	7,5	MPS 500 D4 30, MPC 500 D4 30/T30
FU 22 12	141856	2,2	10,5	MPS 560 D4 30, MPC 560 D4 30/T30

