


DIN 571 wood screw, blue coated Hexagon head

DIN 571, blue galvanized steel

- For secure wood connections
- Hexagon head for improved application of force when installing screws
- The wood screw forms its nut thread instead of cutting.
- A core hole must be pre-drilled depending on the diameter and type of wood (hardwood)



Material	Steel
Surface	Zinc plated
RoHS-compliant	Yes

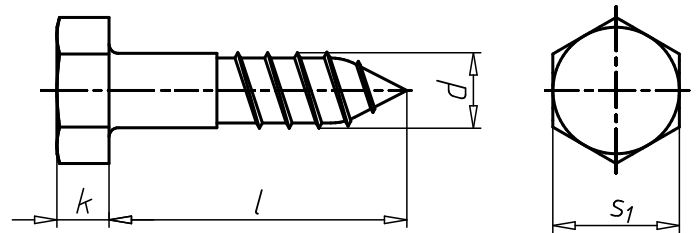

Nominal diameter (d)	Length (l)	Head height (k)	External drive (s ₁)	Art. No.	P. Qty.
5 mm	40 mm	3.5 mm	WS8	0192 5 40	200
5 mm	45 mm	3.5 mm	WS8	0192 5 45	300
5 mm	50 mm	3.5 mm	WS8	0192 5 50	200/500
5 mm	60 mm	3.5 mm	WS8	0192 5 60	2000
6 mm	20 mm	4 mm	WS10	0192 6 20	500/1000
6 mm	25 mm	4 mm	WS10	0192 6 25	500
6 mm	30 mm	4 mm	WS10	0192 6 30	200/1000
6 mm	35 mm	4 mm	WS10	0192 6 35	200/600
6 mm	40 mm	4 mm	WS10	0192 6 40	200
6 mm	45 mm	4 mm	WS10	0192 6 45	200/500
6 mm	50 mm	4 mm	WS10	0192 6 50	200
6 mm	55 mm	4 mm	WS10	0192 6 55	200
6 mm	60 mm	4 mm	WS10	0192 6 60	100/200
6 mm	65 mm	4 mm	WS10	0192 6 65	100
6 mm	70 mm	4 mm	WS10	0192 6 70	100/200
6 mm	80 mm	4 mm	WS10	0192 6 80	100/200
6 mm	90 mm	4 mm	WS10	0192 6 90	50
6 mm	100 mm	4 mm	WS10	0192 6 100	50/200
6 mm	110 mm	4 mm	WS10	0192 6 110	50
6 mm	120 mm	4 mm	WS10	0192 6 120	50
6 mm	140 mm	4 mm	WS10	0192 6 140	100
8 mm	25 mm	5.5 mm	WS13	0192 8 25	500
8 mm	30 mm	5.5 mm	WS13	0192 8 30	200/500
8 mm	35 mm	5.5 mm	WS13	0192 8 35	200/500
8 mm	40 mm	5.5 mm	WS13	0192 8 40	100/500
8 mm	45 mm	5.5 mm	WS13	0192 8 45	100
8 mm	50 mm	5.5 mm	WS13	0192 8 50	100/200
8 mm	55 mm	5.5 mm	WS13	0192 8 55	100
8 mm	60 mm	5.5 mm	WS13	0192 8 60	100/200
8 mm	65 mm	5.5 mm	WS13	0192 8 65	100/200
8 mm	70 mm	5.5 mm	WS13	0192 8 70	100/200
8 mm	75 mm	5.5 mm	WS13	0192 8 75	200
8 mm	80 mm	5.5 mm	WS13	0192 8 80	50/100
8 mm	90 mm	5.5 mm	WS13	0192 8 90	50/150

Nominal diameter (d)	Length (l)	Head height (k)	External drive (s ₁)	Art. No.	P. Qty.
8 mm	100 mm	5.5 mm	WS13	0192 8 100	50/100
8 mm	110 mm	5.5 mm	WS13	0192 8 110	50
8 mm	120 mm	5.5 mm	WS13	0192 8 120	50/100
8 mm	130 mm	5.5 mm	WS13	0192 8 130	50
8 mm	140 mm	5.5 mm	WS13	0192 8 140	50/100
8 mm	150 mm	5.5 mm	WS13	0192 8 150	25/50
8 mm	160 mm	5.5 mm	WS13	0192 8 160	50/100
8 mm	170 mm	5.5 mm	WS13	0192 8 170	50
8 mm	180 mm	5.5 mm	WS13	0192 8 180	50
8 mm	190 mm	5.5 mm	WS13	0192 8 190	500
8 mm	200 mm	5.5 mm	WS13	0192 8 200	50
8 mm	220 mm	5.5 mm	WS13	0192 8 220	1000
10 mm	30 mm	7 mm	WS17	0192 10 30	100
10 mm	35 mm	7 mm	WS17	0192 10 35	100
10 mm	40 mm	7 mm	WS17	0192 10 40	100
10 mm	45 mm	7 mm	WS17	0192 10 45	100
10 mm	50 mm	7 mm	WS17	0192 10 50	50/100
10 mm	60 mm	7 mm	WS17	0192 10 60	50/100
10 mm	70 mm	7 mm	WS17	0192 10 70	50/100
10 mm	80 mm	7 mm	WS17	0192 10 80	50/100
10 mm	90 mm	7 mm	WS17	0192 10 90	25/50
10 mm	100 mm	7 mm	WS17	0192 10 100	25/50
10 mm	110 mm	7 mm	WS17	0192 10 110	25/75
10 mm	120 mm	7 mm	WS17	0192 10 120	25/50
10 mm	130 mm	7 mm	WS17	0192 10 130	25
10 mm	140 mm	7 mm	WS17	0192 10 140	25/50
10 mm	150 mm	7 mm	WS17	0192 10 150	50
10 mm	160 mm	7 mm	WS17	0192 10 160	50
10 mm	170 mm	7 mm	WS17	0192 10 170	50
10 mm	180 mm	7 mm	WS17	0192 10 180	50
10 mm	190 mm	7 mm	WS17	0192 10 190	50
10 mm	200 mm	7 mm	WS17	0192 10 200	25/50
10 mm	220 mm	7 mm	WS17	0192 10 220	25
10 mm	240 mm	7 mm	WS17	0192 10 240	25
10 mm	260 mm	7 mm	WS17	0192 10 260	25
10 mm	280 mm	7 mm	WS17	0192 10 280	25
10 mm	300 mm	7 mm	WS17	0192 10 300	25
10 mm	320 mm	7 mm	WS17	0192 10 320	25
10 mm	360 mm	7 mm	WS17	0192 10 360	15
12 mm	40 mm	8 mm	WS19	0192 12 40	50
12 mm	50 mm	8 mm	WS19	0192 12 50	50/100
12 mm	60 mm	8 mm	WS19	0192 12 60	50/100
12 mm	70 mm	8 mm	WS19	0192 12 70	25/75
12 mm	80 mm	8 mm	WS19	0192 12 80	25/50 /100
12 mm	90 mm	8 mm	WS19	0192 12 90	25/80
12 mm	100 mm	8 mm	WS19	0192 12 100	25/50
12 mm	110 mm	8 mm	WS19	0192 12 110	25
12 mm	120 mm	8 mm	WS19	0192 12 120	50
12 mm	130 mm	8 mm	WS19	0192 12 130	25
12 mm	140 mm	8 mm	WS19	0192 12 140	50
12 mm	150 mm	8 mm	WS19	0192 12 150	50
12 mm	160 mm	8 mm	WS19	0192 12 160	50
12 mm	170 mm	8 mm	WS19	0192 12 170	100
12 mm	180 mm	8 mm	WS19	0192 12 180	50

C101_3508040501, Rev: 0.248, State: 22. 07. 2020

Nominal diameter (d)	Length (l)	Head height (k)	External drive (s ₁)	Art. No.	P. Qty.
12 mm	200 mm	8 mm	WS19	0192 12 200	25
12 mm	220 mm	8 mm	WS19	0192 12 220	25
12 mm	240 mm	8 mm	WS19	0192 12 240	25/50
12 mm	260 mm	8 mm	WS19	0192 12 260	25
12 mm	280 mm	8 mm	WS19	0192 12 280	25
12 mm	300 mm	8 mm	WS19	0192 12 300	25
12 mm	320 mm	8 mm	WS19	0192 12 320	1/25
12 mm	340 mm	8 mm	WS19	0192 12 340	1/10
12 mm	360 mm	8 mm	WS19	0192 12 360	1/10
12 mm	380 mm	8 mm	WS19	0192 12 380	10
12 mm	400 mm	8 mm	WS19	0192 12 400	1/10
12 mm	420 mm	8 mm	WS19	0192 12 420	10
12 mm	440 mm	8 mm	WS19	0192 12 440	10
12 mm	460 mm	8 mm	WS19	0192 12 460	10
12 mm	500 mm	8 mm	WS19	0192 12 500	25
12 mm	520 mm	8 mm	WS19	0192 12 520	25
12 mm	600 mm	8 mm	WS19	0192 12 600	25
16 mm	70 mm	10 mm	WS24	0192 16 70	25
16 mm	80 mm	10 mm	WS24	0192 16 80	25
16 mm	90 mm	10 mm	WS24	0192 16 90	25
16 mm	100 mm	10 mm	WS24	0192 16 100	25
16 mm	110 mm	10 mm	WS24	0192 16 110	25
16 mm	120 mm	10 mm	WS24	0192 16 120	25
16 mm	130 mm	10 mm	WS24	0192 16 130	25
16 mm	140 mm	10 mm	WS24	0192 16 140	25
16 mm	150 mm	10 mm	WS24	0192 16 150	25
16 mm	160 mm	10 mm	WS24	0192 16 160	25
16 mm	180 mm	10 mm	WS24	0192 16 180	25
16 mm	200 mm	10 mm	WS24	0192 16 200	25
16 mm	220 mm	10 mm	WS24	0192 16 220	25
16 mm	240 mm	10 mm	WS24	0192 16 240	25
16 mm	250 mm	10 mm	WS24	0192 16 250	25
16 mm	260 mm	10 mm	WS24	0192 16 260	25
16 mm	280 mm	10 mm	WS24	0192 16 280	25
16 mm	300 mm	10 mm	WS24	0192 16 300	25
16 mm	320 mm	10 mm	WS24	0192 16 320	1/10
16 mm	340 mm	10 mm	WS24	0192 16 340	1
16 mm	360 mm	10 mm	WS24	0192 16 360	25
16 mm	400 mm	10 mm	WS24	0192 16 400	1
16 mm	480 mm	10 mm	WS24	0192 16 480	25
20 mm	100 mm	13 mm	WS30	0192 20 100	50
20 mm	120 mm	13 mm	WS30	0192 20 120	25
20 mm	130 mm	13 mm	WS30	0192 20 130	25
20 mm	240 mm	13 mm	WS30	0192 20 240	1
20 mm	320 mm	13 mm	WS30	0192 20 320	1
20 mm	380 mm	13 mm	WS30	0192 20 380	1
20 mm	400 mm	13 mm	WS30	0192 20 400	1

Can be stored in ORSY system

Details/Application

In timber construction work, especially when building prefabricated terraced houses, equipment halls, for trade-fair construction, boat building, vehicle construction etc.

Notice

Hexagonal wood screws and plastic mushroom seals are used almost exclusively for securing corrugated Eternit sheets to wooden trusses.